

The Second Plus: Real Features, True Benefits



USB Stick

- For fast and easy transfer of data

Wireless Bluetooth

- For cable-free connection to data logger



Electronic Guide Light

- For faster stake-out



FlexField plus

- Modern and intuitive on-board software for higher productivity



Useful tools

- A range of tools, such as a trigger key and laser plummet, speed up your work



PinPoint EDM

- The most precise in its class (1.5 mm + 2 ppm)
- Extremely fast (1 second)
- > 1.000 meters without prism
- Coaxial laser pointer and measurement beam



Alpha-numerical keyboard

- Fast and error-free input



Large high-resolution display

- At-a-glance viewing on the largest high-resolution display in its class



Arctic version

- For use at -35°C (-31°F)



mySecurity

- Unique cloud-based protection against theft





Scan the code
to play
the videos!

Whether you want to survey a parcel of land or objects on a construction site, determine measured points on facades or in rooms, gather the coordinates of a bridge or a tunnel – Leica Geosystems' total stations provide the right solution for every application. They unite reliable results with easy operation and user-friendly applications. Our total stations are designed to meet your specific requirements. Modern technology enables you to work fast and productively, thanks to the straightforward and clearly structured range of functions.

- when it has to be right.

Swiss Technology
by Leica Geosystems



Total Quality Management – our commitment to total customer satisfaction.

Distance meter:
(PinPoint R500 / R1000):
Laser class 3R in accordance
with IEC 60825-1 resp.
EN 60825-1

Laser plummet:
Laser class 2 in accordance
with IEC 60825-1 resp.
EN 60825-1

Distance meter:
(Prism Mode)
Laser class 1 in accordance
with IEC 60825-1 resp.
EN 60825-1

Guide light (EGL):
LED class 1 in accordance
with IEC 60825-1 resp.
EN 60825-1

The **Bluetooth®** word mark and logos are owned by Bluetooth SIG, Inc. and any use of such marks by Leica Geosystems AG is under license.

Other trademark and trade names are those of their respective owners.

Cover picture: Dubai City Skyline

Leica Geosystems AG
Heerbrugg, Switzerland
www.leica-geosystems.com

Illustrations, descriptions and technical data are not binding. All rights reserved. Printed in Switzerland – Copyright Leica Geosystems AG, Heerbrugg, Switzerland, 2013. 789488en – 06.15 – galledia



**FlexLine
TS02plus**
Brochure



**FlexLine
TS09plus**
Brochure



**FlexField plus &
FlexOffice**
Brochure



Viva TS11
Brochure



**Original
Accessories**
Brochure

Please visit www.leica-geosystems.com for detailed information about Leica FlexLine plus and more documents.

- when it has to be **right**

Leica
Geosystems

Leica FlexLine TS06plus

Top Precision meets
High Efficiency



- when it has to be **right**

Leica
Geosystems

The First Plus: Original Leica Geosystems Quality



For most, “quality” is relative. Not so at Leica Geosystems. To ensure our instruments meet the highest precision and quality requirements, we manufacture them in state-of-the-art facilities around the world. Swiss technology combines with exceptional craftsmanship to provide best-in-class devices. And this quality also applies to all of our procedures – moving Leica Geosystems towards business excellence to meet our customers’ needs and expectations in every way. The Leica FlexLine TS06plus Manual Total Station is ideal for many daily surveying tasks, especially for mid- to high-accuracy applications. Banking on the heritage of the previous Leica TS06 model, the most successful of the Leica FlexLine Series, the Leica FlexLine TS06plus is the newest ultimate Total Station.

Welcome to the world of Leica Geosystems. Welcome to a world of people, technologies, services and devices, that you can completely rely on.

ACTIVE customer care 

myworld
©Leica Geosystems

The Third Plus: Top Precision, Speed and Efficiency

The claim "easy to operate" seems to be everywhere. Whether this promise can be kept only becomes apparent in the practice. Because professional measurement experts were involved in its development, the Total Station Leica FlexLine TS06plus allows you to work quickly and effectively right from the first day.

Electronic Distance Measurement:

Wherever high-distance measurement accuracy is required, you can face the challenge of this demanding task with the TS06plus. It provides the most accurate Electronic Distance Measurement.

Prism Mode

- Precision+ (1.5 mm + 2 ppm)
- Speed (1 second)

Non-Prism Mode

- Precision (2 mm + 2 ppm)
- PinPoint EDM with coaxial, small laser pointer and measurement beam for accurate aiming and measuring
- Fewer set-ups required, because targets on which it is not possible to set up a reflector can be measured using reflectorless measurement up to 1.000






The Leica FlexLine TS06plus Communication Side Cover enables cable-free connection to any data collector via Bluetooth, for example the field-controllers Leica Viva CS10 or Leica Viva CS15 with SmartWorks Viva software. The USB-stick enables the flexible transfer of such data as GSI, DXF, ASCII, LandXML and CSV.



Built-in user friendliness: The full alpha-numerical keyboard.

The Leica TS06plus standard built-in alpha-numerical keyboard enables fast and easy entry of numbers, letters and special characters, e.g. for coding. It increases the work speed while at the same time reducing possible sources of error.

FlexField plus Onboard Software: Easy to use due to its graphical guidance and intuitive workflows.

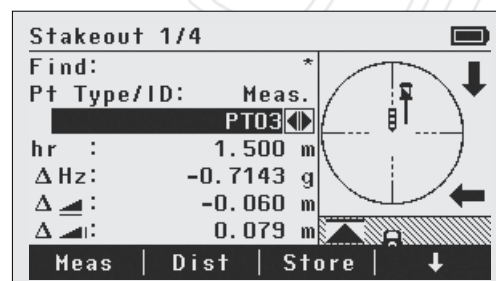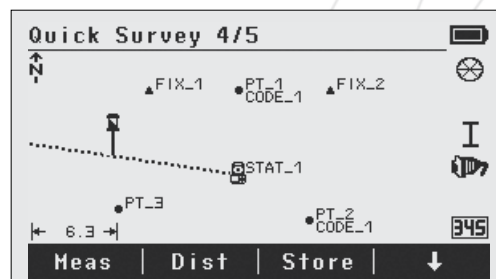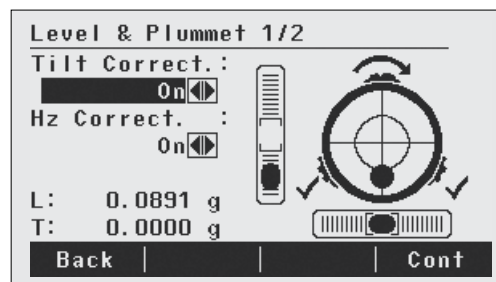

Leica Geosystems – mySecurity

mySecurity gives you total peace of mind. If your instrument is ever stolen, a locking mechanism is available to ensure that the device is disabled and can no longer be used.

Leica FlexLine Plus

Proven Specifications, Reliable Instruments

Leica FlexLine TS06plus specifications:

	Angle Measurement (Hz, V)				Telescope		
	Accuracy ¹⁾	1" (0.3 mgon) / 2" (0.6 mgon) 3" (1 mgon) / 5" (1.5 mgon) 7" (2 mgon)	✓		Magnification	30 x	✓
	Method	Absolute, continuous, diametrical: at all models	✓		Resolving power	3"	✓
	Display resolution	0.1" / 0.1 mgon / 0.01 mil	✓		Field of View	1° 30' (1.66 gon) 2.7 m at 100 m	✓
	Compensation	Quadruple Axis Compensation: at all models	✓		Focusing range	1.7 m to infinity	✓
	Compensator Setting Accuracy	0.5" / 0.5" / 1" / 1.5" / 2"	✓		Reticle	Illuminated, 10 brightness levels	✓
	Compensator range	0.07 gon	✓		Keyboard and Display		
	Endless Drives	Smooth movements with no delayed response time	✓		Keyboard and Display	Full Alpha-numerical keyboard with high resolution Black & White display, Graphics, 160 x 288 pixels, display illuminated, 5 brightness levels	✓
					Position	Face I, Face II	✓
	Distance Measurement with Reflector				Operating System		
	Range ²⁾ Round prism (Leica GPR1)	3.500 m	✓		Windows CE	5.0 Core	✓
	Range ²⁾ Reflective tape (60 mm x 60 mm)	>500 m ⁹⁾ >1000 m ¹⁰⁾	✓		Laserplummet		
	Range ²⁾ Prism-Long (Leica GPR1, R500/R1000)	>10.000 m	✓		Type	Laser point, 5 brightness levels	✓
	Accuracy ³⁾	Precise+: 1.5 mm + 2.0 ppm Precise Fast: 2.0 mm + 2.0 ppm Tracking: 3.0 mm + 2.0 ppm	✓		Centering accuracy	1.5 mm at 1.5 m Instrument height	✓
	Typical Measurement time ⁴⁾	1.0 s	✓		Battery		
	Measurement time while in "Precise+" mode:	2.4 s	✓		Type	Lithium-Ion	✓
	Distance Measurement without Reflector ⁸⁾				Operating time ⁷⁾	approx. 30 hours	✓
	Range ⁵⁾				Battery charging time	2.3 hours	✓
PinPoint R500 / R1000	> 500 m / > 1000 m	✓	Weight				
Accuracy ^{3) 6)}	2 mm + 2 ppm	✓	Total station including GEB211 and tribrach	5.1 kg	✓		
Laser dot size	At 30 m: approx. 7 x 10 mm At 50 m: approx. 8 x 20 mm	✓	Environmental				
Data storage / Communication				Temperature range (operation)			
Internal memory	Max.: 100'000 fixpoints, Max.: 60'000 measurements	✓		-20° C to +50° C (-4° F to +122° F)			
Interfaces	- Serial (Baudrate up to 115'200) - USB Type A and mini B, - Bluetooth® Wireless, class 1, 150 m - > 1000 m (with TCP529)	✓ ✓ ✓ ○		Arctic Version -35° C to 50° C (-31° F to +122° F)			
Data formats	GSI / DXF / LandXML / CSV / user definable ASCII formats	✓		Dust / Water (IEC 60529) Humidity			
Guide Light (EGL)				IP55, 95%, non condensing			
Working Range (average atmospheric conditions)	5 m - 150 m	○		Leica FlexField plus Onboard Software			
Positioning accuracy	5 cm at 100 m	○		Included Application Programs: Survey incl. Map View; Stake Out; Station Setup including: Resection, Local Resection, Helmert Re- section, Orientation (Angles & Coordinates), Height Transfer; Area (Plan & Surface); DTM Volume calculation; Tie Distance (MLM); Remote Height; Hidden Point; Backsight Check; Offset; Reference Line; Reference Arc; Reference Plane; Road 2D; COGO			
				Extra Application Programs: Road 3D, Traverse			
				Theft protection			
			mySecurity, PIN/PUK Code				

Model Comparison: Configurations & Options of Manual Total Stations

	TS02plus	TS06plus	TS09plus	Viva TS11
1" angular accuracy	-	○	○	○
Enhanced measurement accuracy to prism	1.5 mm + 2 ppm	1.5 mm + 2 ppm	1.5 mm + 2 ppm	1.0 mm + 1.5 ppm
Reflectorless measurement range	500 m option	500 m included/1000 m option	500 m included/1000 m option	500 m included/1000 m option
Display with graphics and display illumination	Black & White high resolution	Black & White high resolution	Q-VGA Color & Touch	Full-VGA Color & Touch
Full alpha-numerical keyboard with function keys	-	✓	✓	✓
Second Keyboard	○	○	○	○
Keyboard illumination	-	-	✓	✓
Electronic Guide Light	-	○	✓	✓
USB Type A and mini B	-	✓	✓	✓
Bluetooth® Wireless	-	✓	✓	✓
SD Card	-	-	-	✓
Imaging capability	-	-	-	○
Smart Station GNSS capability	-	-	-	○
Onboard software (package content)	FlexField plus (standard)	FlexField plus (advanced)	FlexField plus (full)	SmartWorx Viva (pro)

Legend:

- | | | | |
|--|---|---|-----------------|
| 1) Standard deviation ISO-17123-3 | varies with atmospheric conditions, target reflectivity and surface structure. | 8) Reflectorless measurement time may vary according to measuring objects, observation situations and environmental conditions. | ✓ Included |
| 2) Overcast, no haze, visibility about 40 km; no heat shimmer. | 6) Range > 500m 4mm+2ppm | 9) with R500 option using Non-prism mode | ○ Option |
| 3) Standard deviation ISO-17123-4 | 7) Single Measurement every 30 second at 25° C. Battery time may be shorter if battery is not new. Internal battery GEB222. | 10) with R1000 option using Non-prism mode | - Not available |
| 4) Prism Precise Fast mode | | | |
| 5) Under optimal conditions on Kodak Grey Card (90% reflective). Maximum range | | | |